VFR TERMINAL AREA CHART
MEMPHIS

Airports having Control Towers are shown in Blue, all others in Magenta. Consult Airport/Facility Directory (A/FD) for details involving airport lighting, navigation aids, and services. For additional symbol information refer to the Chart User's Guide.

AIRPORTS

Other than hard-surfaced runways

Seaplane Base

Hard-surfaced runways 1500 ft. or greater

Open dot within hard-surfaced runway configuration indicates approximate VOR, VOR-DME, or VORTAC location.

All recognizable hard-surfaced runways, including those closed, are shown for visual identification. Airports may be public or private.

ADDITIONAL AIRPORT INFORMATION

Private *(Pvt)* - Non-public use having emergency or landmark value

Military - Other than hard-surfaced; all military airports are identified by abbreviations AFB, NAS, AAF, etc. DoD users, for complete airport information consult DoD FLIP.

Heliport Selected

Unverified

Abandoned - paved having landmark value, 3000 ft. or greater

Ultralight Flight Park Selected

Services - fuel available and field tended during normal working hours depicted by use of ticks around basic airport symbol. (Normal working hours are Mon thru Fri 1000 A.M. to 4:00 P.M. local time.) Consult A/FD for service availability at airports with hard-surfaced runways 1500 ft. or greater.

Rotating airport beacon in operation Sunset to Sunrise

AIRPORT DATA

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns.

Runways with Right Traffic Patterns (public use)

RP - Special conditions exist - see A/FD.

FSS - Flight Service Station

NO SVFR - Fixed-wing special VFR flight is prohibited.

CT - 118.3 - Control Tower (CT) - primary frequency

* - Star indicates operation part-time. See tower frequencies tabulation for hours of operation.

C - Common Traffic Advisory Frequencies (CTAF)

ATIS 123.8 - Automatic Terminal Information Service

ASOS/AWOS 135.42 - Automated Surface Weather Observing Systems (shown where full-time ATIS not available). Some ASOS/AWOS facilities may not be located at airports.

UNICOM - Aeronautical advisory station

VFR Advsy - VFR Advisory Service shown where full-time ATIS not available and frequency is other than primary CT frequency.

285 - Elevation in feet

L - Lighting in operation Sunset to Sunrise

*L - Lighting limitations exist; refer to Airport/Facility Directory.

72 - Length of longest runway in hundreds of feet; usable length may be less.

When information is lacking, the respective character is replaced by a dash. Lighting codes refer to runway edge lights and may not represent the longest runway or full length lighting.

FSS — FAR 91 — NO SVFR — Location Identifier — NAME (PNAME) — ICAO — CT - 118.3 — ATIS 123.8 — Location Indicator shown outside contiguous U.S. — VFR Advsy 125.0 — UNICOM — AOE — Airport of Entry

Box indicates FAR 93 Special Air Traffic Rules & Airport Traffic Patterns. Runways with Right Traffic Patterns (public use) — RP 23, 34 — RP * Special conditions exist - see A/FD.

Example: 285 L 72 122.95

AIRPORT TRAFFIC SERVICE AND AIRSPACE INFORMATION

Only the controlled and reserved airspace effective below 14,000 ft. MSL are shown on this chart. All times are local.

Class B Airspace

Class C Airspace (Mode C - see FAR 91.215(Alt.))

Class D Airspace

Ceiling of Class D Airspace in hundreds of feet (A minus ceiling value indicates surface up to but not including that value.)

Class E (dfd) Airspace

Class E Airspace with floor 700 ft. above surface

Class E Airspace with floor 1200 ft. or greater above surface that abuts Class G Airspace

2400 MSL — Differentiates floors of Class E Airspace greater than 700 ft. above surface.

4500 MSL

Class E Airspace exists at 1200' AGL unless otherwise designated as shown above.

Class E Airspace low altitude Federal Airways are indicated by center line. Intersection - Arrows are directed towards facilities which establish intersection.

132 — V69 — Total mileage between NAVAIDs on direct Airways

Class E Airspace low altitude RNAV Routes are indicated by center line. — GRANT — T319 — RNAV waypoint and name

Prohibited, Restricted, and Warning Areas; Canadian Advisory, Danger, and Restricted Areas

Alert Area and MOA - Military Operations Area

Special Airport Traffic Area (See FAR 93 for details.)

ADIZ - Air Defense Identification Zone

MODE C (See FAR 91.215(Alt.))

National Security Area

Terminal Radar Service Area (TRSA)

IR211 - MTR - Military Training Route

IFR Departure Route

IFR Arrival Route

COMMUNICATION BOXES

OAKDALE — 122.1R 122.6 123.6 — 382° 139.0 OAK

Underline indicates no voice on frequency. Crosshatch indicates Shutdown status. ✦ - Operates less than continuous or On-Request. A - ASOS/AWOS. H - HIWAS. T - TWEB. FSS radio providing voice communication.

122.1R — MIAMI

Heavy line box indicates Flight Service Station (FSS). Frequencies 121.5, 122.2, 243.0 and 255.4 (Canada - 121.5, 120.7 and 243.0) are available at many FSSs and are not shown above boxes. All other frequencies are shown.

Certain FSSs provide Airport Advisory Service, see A/FD.

R - Receive only

Frequencies above thin line box are remoted to NAVAID site. Other FSS frequencies providing voice communication may be available as determined by altitude and terrain. Consult Airport/Facility Directory for complete information.

CHICAGO CHI — 122.1R

RADIO AIDS TO NAVIGATION

VHF OMNI RANGE (VOR)

VORTAC

VOR-DME

Other facilities, i.e., FSS Outlet, RCO, etc.

Non-Directional Radiobeacon (NDB)

NDB - DME

OBSTRUCTIONS

1000 ft. and higher AGL

below 1000 ft. AGL

or — Group Obstruction

Obstruction with high-intensity lights; may operate part-time.

2049 (1149) — Elevation of the top above mean sea level

Height above ground

UC — Under construction or reported; position and elevation unverified

NOTICE: Guy wires may extend outward from structures.

TOPOGRAPHIC INFORMATION

Roads & Road Markers

Railroad

Power Transmission Line

Aerial Cable

Landmark Feature - stadium, factory, school, golf course, etc.

Outdoor Theater

Lookout Tower

618 (Elevation Base of Tower)

Coast Guard Station

Race Track

Tank - water, oil or gas

Oil Well — Water Well

Mine or Quarry

Mountain Pass

11823 (Elevation of Pass)

(Pass symbol does not indicate a recommended route or direction of flight and pass elevation does not indicate a recommended clearance altitude. Hazardous flight conditions may exist within and near mountain passes.)

Perennial Lake — Dams

Pier — Rocks — Intermittent Lake — Bridges and Viaducts

MISCELLANEOUS

-1°C — Isogonic Line (2005 VALUE)

Ultralight Activity — Flashing Light

Hang Glider Activity — Marine Light

Glider Operations

Parachute Jumping Area (See Airport/Facility Directory.)

VPXYZ — NAME (VPXYZ) — VFR Waypoints (See Airport/Facility Directory for latitude/longitude.)

VFR TERMINAL AREA CHART
MEMPHIS

SCALE 1:250,000

Lambert Conformal Conic Projection Standard Parallels 33° and 45°
Horizontal Datum: North American Datum of 1983 (World Geodetic System 1984)

42ND EDITION EFFECTIVE 0901Z 8 APR 2010
TO 0901Z 23 SEP 2010

Includes airspace amendments effective 8 APR 2010
and all other aeronautical data received by 11 FEB 2010

Information on this chart will change; consolidated updates of chart changes are available every 56 days in the AIRPORT/FACILITY DIRECTORY Chart Bulletin section (online at www.naco.faa.gov). Also consult appropriate NOTICES TO AIRMEN (NOTAMs) and other FLIGHT INFORMATION PUBLICATIONS (FLIPs) for the latest changes.

PUBLISHED IN ACCORDANCE WITH INTERAGENCY AIR CARTOGRAPHIC COMMITTEE SPECIFICATIONS AND AGREEMENTS. APPROVED BY: DEPARTMENT OF DEFENSE • FEDERAL AVIATION ADMINISTRATION

MEMPHIS
CLASS B AIRSPACE

See back of this chart for procedural information within the Memphis Class B Airspace

EXAMPLES OF CLASS B ALTITUDES

70 --- Ceiling in hundreds of feet MSL

30 --- Floor in hundreds of feet MSL

CONTROL TOWER FREQUENCIES ON MEMPHIS TERMINAL AREA CHART

Airports with control towers are indicated on the face of the chart by the letters CT followed by the primary VHF local control frequency (ies). Information for each tower is listed in the table below. Operational hours are local time. The primary VHF and UHF local control frequencies are listed. An asterisk (*) indicates the part-time tower frequency is remoted to a collocated full-time FSS for use as Airport Advisory Service (AAS) during hours the tower is closed. The primary VHF and UHF ground control frequencies are listed.

Automatic Terminal Information Service (ATIS) frequencies shown on the face of the chart are primary arrival VHF/UHF frequencies. All ATIS frequencies are listed in the table below. ATIS operational hours may differ from tower operational hours.

ASR and/or PAR indicate Radar Instrument Approach available.

MON-FRI indicates Monday through Friday.

CONTROL TOWER	OPERATES	TWR FREQ	GND CON	ATIS	ASR/PAR
MEMPHIS INTL	CONTINUOUS	118.3 (RWY 9/27) 119.7 (RWYS 18C/36C & 18L/36R) 128.425 (RWY 18R/36L) 257.8	121.9 (RWY 9/27) 121.65 (RWY 18C/36L) 121.9 (RWYS 18C/36C & 18L/36R) 279.2	127.75	
MILLINGTON	0900-0200 MON 0530-0200 TUE-FRI 0530-1900 SAT-SUN	120.25 340.2	121.375		
OLIVE BRANCH	0700-2100	125.275	121.2	119.925	

CLASS B, CLASS C, TRSA, AND SELECTED RADAR APPROACH CONTROL FREQUENCIES

FACILITY	FREQUENCIES	SERVICE AVAILABILITY
MEMPHIS CLASS B	125.8 338.3 (256°-175°) 119.1 291.6 (176°-355°)	CONTINUOUS

SPECIAL USE AIRSPACE ON MEMPHIS TERMINAL AREA CHART

Unless otherwise noted altitudes are MSL and in feet. Time is local. "TO" on altitude means "To and including." FL - Flight Level. NO A/G - No air to ground communications. Control nearest FSS for information.

† Other times by NOTAM. NOTAM - Use of this term in Restricted Areas indicates FAA and DoD NOTAM systems. Use of this term in all other Special Use areas indicates the DoD NOTAM system.

U.S. P-PROHIBITED, R-RESTRICTED, W-WARNING, A-ALERT, MOA-MILITARY OPERATIONS AREA

MOA NAME	ALTITUDE*	TIME OF USE†	CONTROLLING AGENCY/ CONTACT FACILITY	FREQUENCIES
COLUMBUS 3	8000	SR-SS NORMALLY MON-FRI	MEMPHIS CNTR	

*Altitudes indicate floor of MOA. All MOAs extend to but do not include FL 180 unless otherwise indicated in tabulation or on chart.
† – Other times by DoD NOTAM.

Published by the U.S. Department of Transportation
Federal Aviation Administration
National Aeronautical Charting Office
www.naco.faa.gov

FAA Product ID: TMEM

NSN 7641014099658 — EFF. DATE 10098

NGA REF. NO. VFRTAMEMPHIS

MILITARY TRAINING ROUTES (MTRs)

All IR and VR MTRs are shown, and may extend from the surface upwards. Only the route centerline, direction of flight along the route and the route designator are depicted - route widths and altitudes are not shown.

Since these routes are subject to change every 56 days, and the charts are reissued every 6 months, you are cautioned and advised to contact the nearest FSS for route dimensions and current status for those routes affecting your flight.

Routes with a change in the alignment of the charted route centerline will be indicated in the Aeronautical Chart Bulletin of the Airport/Facility Directory.

DoD users refer to Area Planning AP/1B Military Training Routes North and South America for current routes.

Flight Following Services are available on request and highly recommended in and around Class B, C, and TRSA areas.

CAUTION: This chart is primarily designed for VFR navigational purposes and does not purport to indicate the presence of all power transmission and telecommunication lines, terrain or obstacles which may be encountered below reasonable and safe altitudes.

REGULATIONS REGARDING FLIGHTS OVER CHARTED NATIONAL PARK SERVICE AREAS, U.S. FISH AND WILDLIFE SERVICE AREAS, AND U.S. FOREST SERVICE AREAS

The landing of aircraft is prohibited on lands or waters administered by the National Park Service, U.S. Fish and Wildlife Service or U.S. Forest Service without authorization from the respective agency. Exceptions include: 1) when forced to land due to an emergency beyond the control of the operator, 2) at officially designated landing sites, or 3) on approved official business of the Federal Government.

All aircraft are requested to maintain a minimum altitude of 2,000 feet above the surface of the following: National Parks, Monuments, Seashores, Lakeshores, Recreation Areas and Scenic Riverways administered by the National Park Service; National Wildlife Refuges, Big Game Refuges, Game Ranges and Wildlife Ranges administered by the U.S. Fish and Wildlife Service; and Wilderness and Primitive areas administered by the U.S. Forest Service. FAA Advisory Circular (AC) 91-36, "Visual Flight Rules (VFR) Flight Near Noise-Sensitive Areas," defines the surface as: the highest terrain within 2,000 feet laterally of the route of flight, or the upper-most rim of a canyon or valley.

Federal regulations also prohibit airdrops by parachute or other means of persons, cargo, or objects from aircraft on lands administered by the three agencies without authorization from the respective agency. Exceptions include: 1) emergencies involving the safety of human life, or 2) threat of serious property loss.

Boundary of National Park Service areas, U.S. Fish and Wildlife Service areas, and U.S. Forest Service Wilderness and Primitive areas.

Features normally used as checkpoints for controlling VFR traffic are emphasized on this series of charts so they may be readily identified.

Example: POWER PLANT

The name shown is that used by the controlling personnel and is not necessarily the official name of the feature.

Entire area of this chart is within the Central Standard Time Zone +6 (+5 DT) = UTC

FOR PROCUREMENT CONTACT:
FAA, National Aeronautical Charting Office
Distribution Division, ATO-W
10201 Good Luck Road
Glenn Dale, MD 20769-9700
Online at www.naco.faa.gov
Email 9-AMC-Chartsales@faa.gov
Telephone 1-800-638-8972
Fax 301-436-6829
or any authorized FAA Chart Agent

CONVERSION OF ELEVATIONS

FEET (Thousands) 0 2 4 6 8 10 12 14 16 18 20 22 24 26 28 30

METERS (Thousands) 0 1 2 3 4 5 6 7 8 9

Class G Airspace within the United States extends up to 14,500 feet MSL. At and above this altitude all airspace is within Class E Airspace, excluding the airspace less than 1500 feet above the terrain and certain special use airspace areas.

CAUTION: Severe turbulence may occur over rugged terrain. See AIM.

REPORTING CHART ERRORS

You are requested to inform us of chart errors and/or additions that come to your attention while using this chart. Telephone toll free at 1-800-626-3677, or email us at 9-AMC-Aerochart@faa.gov. Frequently asked questions (FAQs) are answered on our website at www.naco.faa.gov. See the FAQs prior to contact via toll free number or email. Where delineation of data is required such information should be depicted clearly and accurately on a current chart, a replacement copy will be returned.

Mail to: FAA, National Aeronautical Charting Office, ATO-W, SSMC- 4, Sta. #2335, 1305 East West Highway, Silver Spring, MD 20910-3281.

ATTENTION

THIS CHART CONTAINS MAXIMUM ELEVATION FIGURES (MEF).

The Maximum Elevation Figures shown in quadrangles bounded by ticked lines of latitude and longitude are expressed in HUNDREDS and HUNDREDS of feet above mean sea level. The MEF is based on information available concerning the highest known feature in each quadrangle, including terrain and obstructions (trees, towers, antennas, etc.).

Example: 12,500 feet 125

NORTH AMERICAN AEROSPACE DEFENSE COMMAND (NORAD) PROCEDURES

All aircraft operating in the U.S. national airspace, if capable, will maintain a listening watch on guard frequencies 121.5 or UHF 243.0. It is incumbent upon all aviators to know and understand their responsibilities if intercepted. Review "AIM" section 5-6-2 for intercept procedures. Additionally, if U.S. military fighter jets intercept an aircraft and flares are dispensed in the area of that aircraft, aviators will pay strict attention, contact air traffic control immediately on the local frequency or on VHF guard 121.5 or UHF 243.0 and follow the interceptor visual ICAO signals. Be advised that non-compliance may result in the use of force.

GROUND ELEVATIONS in FEET 710 — Sea Level — CONTOUR INTERVAL 250'

GILMORE 113.0 Ch 77 GGE

CTC MEMPHIS APP ON 125.8 OR 338.3

CTC MEMPHIS APP ON 119.1 OR 291.6

MEMPHIS

0 NAUTICAL MILES 5 10 15 20 25 30 35 40 45 50 55 60 65 70

0 STATUTE MILES 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80

0 KILOMETERS 5 10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100 105 110 115 120 125

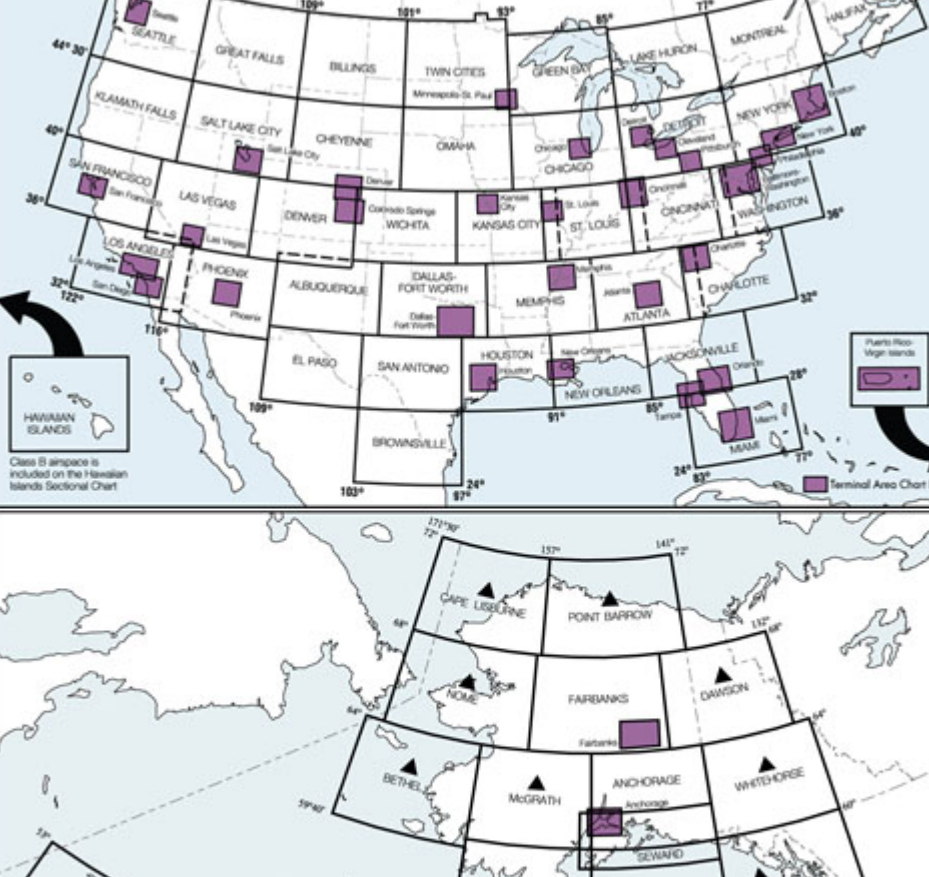
SEATTLE
GREAT FALLS
BILLINGS
TWIN CITIES
Minneapolis-St. Paul
GREEN BAY
LAKE HURON
MONTREAL
HALIFAX
KLAMATH FALLS
SALT LAKE CITY
Salt Lake City
CHEYENNE
Denver
OMAHA
Chicago
CHICAGO
DETROIT
Detroit
Cleveland
Pittsburgh
NEW YORK
Boston
New York
Philadelphia
SAN FRANCISCO
San Francisco
LAS VEGAS
Las Vegas
DENVER
Colorado Springs
WICHITA
KANSAS CITY
Kansas City
ST. LOUIS
St. Louis
CINCINNATI
Cincinnati
WASHINGTON
Washington
LOS ANGELES
Los Angeles
San Diego
PHOENIX
Phoenix
ALBUQUERQUE
DALLAS-FORT WORTH
Dallas
Fort Worth
MEMPHIS
Memphis
ATLANTA
Atlanta
CHARLOTTE
Charlotte
EL PASO
SAN ANTONIO
HOUSTON
Houston
New Orleans
NEW ORLEANS
JACKSONVILLE
Orlando
Tampa
Miami
MIAMI
BROWNSVILLE
HAWAIIAN ISLANDS
Class B airspace is included on the Hawaiian Islands Sectional Chart
Puerto Rico-Virgin Islands
Terminal Area Chart
CAPE LISBURNE
POINT BARROW
NOME
FAIRBANKS
Fairbanks
DAWSON
BETHEL
McGRATH
ANCHORAGE
Anchorage
WHITEHORSE
SEWARD